

- SQ.KHQ -Submersible stainless sump pump~SCS 13 (#304)
- SSQ -Submersible stainless sewage pump~SCS 13 (#304)

FEATURES:


- Extra long life design, since the pump body and all related parts are made of casting stainless SCS 13(#304), these will have the capability of anti-acid & alkali; and also suitable for using in sea water.
- Equipped with double mechanical seals, together with anti-corrosion viton so as to make up these special assemblies.
- Impeller was balancing processed, this vibration free advantage brings the pump and motor superior servicing life.

SQ/SSQ/KHQ

APPLICATIONS:

- The pumps are applicable in the following industries: Chemistry, heavy-chemistry, medicines, photograph, dyeing, bleaching, food, fishery, drinks, brewing, oil and fat, oil refining, cosmetic, fiber, metal treatment and electro-plating.
- For a member of plant for preventing pollution, sewage and drainage treatment, washing plant, dust collecting plant and clean air plant.

PERFORMANCE CURVE :

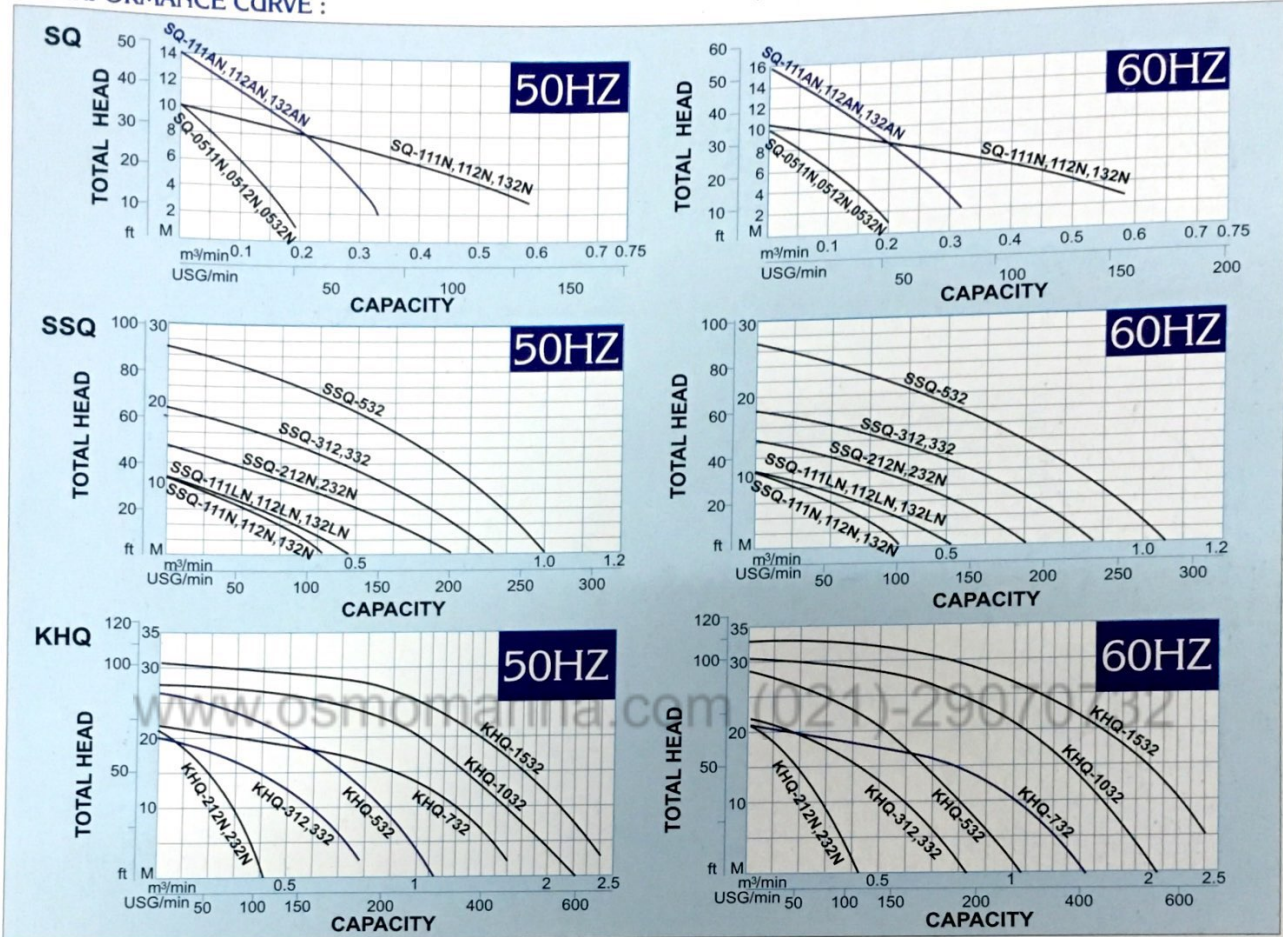

SPECIFICATIONS:

DIMENSIONS:

型式 TYPE	電動機 MOTOR			50HZ				60HZ				電纜 重量 Cable Weight		尺寸 SIZE								
	Power HP	Phase PH	Volt V	Disch. Inch	Total Flow M ³ /MIN	Max. Flow M ³ /MIN	Total Flow M ³ /MIN	Max. Flow M ³ /MIN	Total Flow M ³ /MIN	Max. Flow M ³ /MIN	Cable mm ² xM	Weight KG	A mm	B mm	C mm	D mm	E mm	F mm				
																			Disch. mm	Total Flow M ³ /MIN	Max. Flow M ³ /MIN	Total Flow M ³ /MIN
SQ-0511N	1/2	0.4	1	110	2"	50	7	0.08	10	0.21	6	0.10	10	0.21	1.25 ² x6	11	230	120	160	165	80	415
SQ-0512N			3	220-440																		
SQ-0532N			3	220-440																		
SQ-111AN	1	0.75	1	110	2"	50	8.3	0.20	14	0.36	10.1	0.16	16	0.36	2 ² x6	21	265	130	190	180	85	460
SQ-112AN			3	220-440																		
SQ-132AN			3	220-440																		
SQ-111N	1	0.75	1	110	3"	80	6.2	0.38	10	0.71	6.2	0.39	10.5	0.72	2 ² x6	24	300	150	190	240	125	505
SQ-112N			3	220-440																		
SQ-132N			3	220-440																		
SSQ-111N	1	0.75	1	110	2"	50	6.1	0.28	10	0.41	6.2	0.20	10	0.38	2 ² x6	22	290	135	225	205	115	495
SSQ-112N			3	220-440																		
SSQ-132N			3	220-440																		
SSQ-111LN	1	0.75	1	110	3"	80	5	0.33	10	0.48	6.5	0.27	10	0.5	2 ² x6	24	320	150	225	235	118	500
SSQ-112LN			3	220-440																		
SSQ-132LN			3	220-440																		
SSQ-212N	2	1.5	1	220	3"	80	7.4	0.48	14	0.75	8.9	0.49	14	0.7	3.5 ² x10	36	355	165	265	260	140	550
SSQ-232N			3	220-440																		
SSQ-312	3	2.2	1	220	4"	100	11	0.40	19	0.86	10	0.41	18	0.87	3.5 ² x10	53	410	192	265	290	140	580
SSQ-332			3	220-440																		
SSQ-532	5	3.7	3	220-440	4"	100	14.2	0.51	27	1.0	16	0.49	27	1.05	3.5 ² x10	49	410	192	265	290	140	480
KHQ-212N	2	1.5	1	220	2"	50	11.5	0.21	20	0.41	12.3	0.21	21	0.41	3.5 ² x10	46	228	80	560			
KHQ-232N			3	220-440																		
KHQ-312	3	2.2	1	220	3"	80	10.2	0.46	20	0.8	12.2	0.50	22	0.82	3.5 ² x10	49	228	80	460			
KHQ-332			3	220-440																		
KHQ-532	5	3.7	3	220-440	4"	100	13.5	0.62	26	1.14	15.7	0.65	28	1.05	3.5 ² x10	49	232	100	605			
KHQ-732	7 1/2	5.5	3	220-440	4"	100	12.8	1.08	22	1.7	12.3	1.04	21	1.51	5.5 ² x10	70	272	125	720			
KHQ-1032	10	7.5	3	220-440	6"	150	19.3	1.33	27	2.2	16.7	1.39	30	2.1	5.5 ² x10	78	272	125	665			
KHQ-1532	15	11	3	220-440	6"	150	17.7	1.45	30	2.4	19.6	1.64	32	2.4	8 ² x10	115	335	200	785			

• PUMP CONSTRUCTION IS MADE OF CASTING STAINLESS.